

# Noah

3series  
SPECIALTY N-331Z



1-310-323-1134


www.timbucktoomfg.com  
www.tmiusa.net

Flood Recovery & Restoration / Automatic Dumping Machine

*Designed to move/pump out liquid, sludge, and solids up to 1/2" diameter*

Manufacturer of commercial & environmental cleaning equipment


© 2011 TIMBUCKTOO MFG., INC.

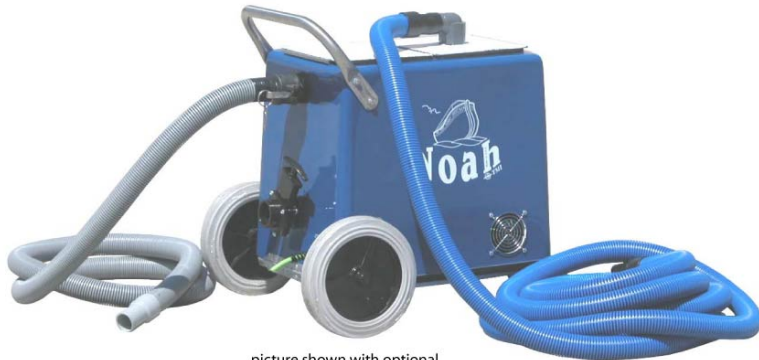

picture shown with optional shorter dumping hose with standard 50' vacuum hose and optional 10" wheel (please call for more information)




sludge

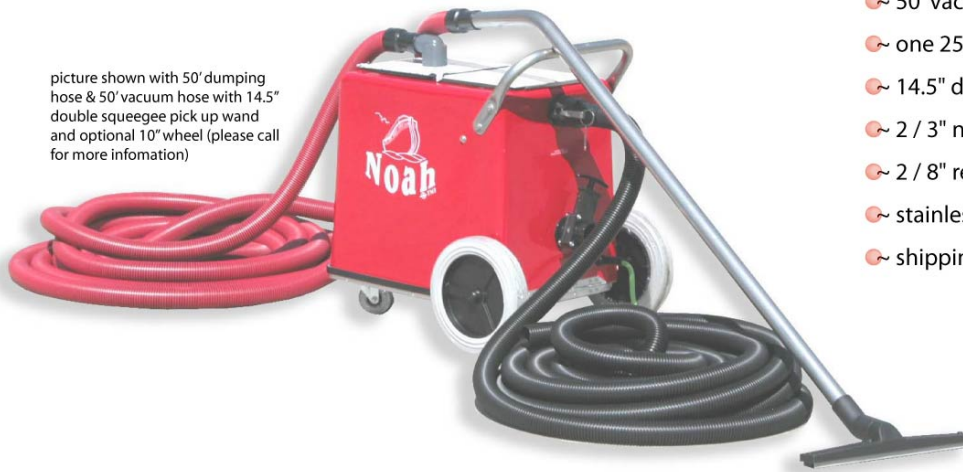

picture shown with 50' dumping hose & 50' vacuum hose with 14.5" double squeegee pick up wand and optional 10" wheel (please call for more information)



additional dump hose with locking connection



hose mender

## Specifications: (N-331Z)

- heavy duty fiber composite body
- three stage vacuum motor
- 140+” suction power (H2O)
- air flow 107 (cfm)
- pump flow rate 1860 gph (MAX)
- capable of recovering water & debris - then discharging to an acceptable and legal drain
- 120 volt AC with 16 amperes (MAX 20 amp.)
- stainless steel pre filter
- 10 gallon capacity tank
- easy access to all mechanical components
- exterior dimension H 26" x W 17" x L 22"
- stainless steel stationary handle
- 50' vacuum hose & 50' dumping hose
- one 25' 12-3 cord
- 14.5" double squeegee pick up wand
- 2 / 3" non-marking swivel casters
- 2 / 8" rear wheels
- stainless steel lid
- shipping weight 90lb.

## Options/ Accessories:

- additional dump hose with quick locking connection
- additional vacuum hose with hose mender
- acoustic muffling system
- multitude of squeegee pick up wands

NOTE: \* some options may not be used with standard specifications.  
\* hose length can be added 5 ft. increments up to 50 ft. per length.

standard color: blue, red, grey  
CAUTION: Do not use flammable and volatile material.